


PROMO[®] 2000 HP

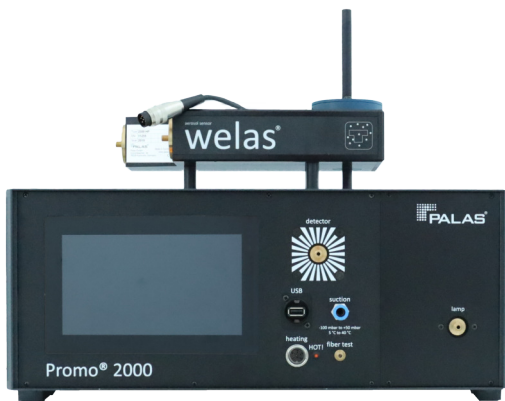

The *welas*[®] aerosol sensors *welas*[®] 2070 HP, 2100 HP, 2300 HP and *welas*[®] 2500 HP are equipped with a cuvette heatable up to 120 °C and pressure-tight up to 10 barg to ensure isobaric and isothermal sampling into the sensor's measurement volume. The *Promo*[®] system is usually calibrated for the operating volume flow. As the operating volume flow changes with pressure and temperature, it is advantageous for the user if automatic volume flow regulation for the sampling volume flow is provided for in the device.

In the *Promo*[®] 2000 HP the pressure and temperature of the carrier gas are measured and the required operating volume flow is automatically set to 5 l/min.

BENEFITS

- Sehr hohe Größenauflösung
- Konzentrationsbereich von < 1 Partikel/cm³ bis 10⁶ Partikel/cm³
- Kalibrierkurven für unterschiedliche Brechungsindizes
- Sehr hoher und reproduzierbarer Zählwirkungsgrad schon ab 0,2 µm
- Druckfest bis 10 bar (optional)
- Heizbar bis 250°C (optional)
- Lichtwellenleitertechnik
- Einfache Bedienung durch großes Touchdisplay
- Kalibrierung, Reinigung und Lampenwechsel können vom Kunden eigenständig durchgeführt werden
- Externe Ansteuerung über RS 232 oder Ethernet

APPLICATIONS

- Emissionsüberwachung von Anlagen
- Steuerung von Mahl- und Sichtprozessen
- Überwachung von Produktionsprozessen in der Lebensmittel-, Pharma- und Chemieindustrie
- Test von Komplettfiltern, Trägheits- und Nassabscheidern oder Elektrofiltern

FEATURES

- Up to three measuring ranges: 0.2 µm - 10 µm | 0.3 µm - 17 µm | 0.6 µm - 40 µm
- Up to 128 size channels per measuring range
- Clear calibration curve thanks to white light source with 90° stray light detection
- Patented T-aperture: No edge zone error
- Digital single signal processing: Coincidence detection and correction on the single signal
- Selectable sensors for optimized measurement with regard to concentration
- On-site calibration and adjustment (particle size and volume flow)

DATASHEET

Measuring principle	Optical light-scattering
Measurement range (number C_N)	$< 1 \cdot 10^6$ particles/cm ³
Measurement range (size)	0.2 – 10 μm , 0.3 – 17 μm , 0.6 – 40 μm , 2 – 100 μm
Volume flow	5 l/min
Size channels	Max. 128 (64/decade)
Interfaces	USB, Ethernet (LAN), Wi-Fi, RS-232/485
User interface	Touchscreen, 800 • 480 pixel, 7" (17.78 cm)
Data logger storage	4 GB Compact Flash
Software	PDControl, FTControl, PDAnalyze
Data acquisition	Digital, 20 MHz processor, 256 raw data channels
Light source	Xenon arc lamp 35 W
Housing	Table housing, optional: with mounting brackets for rack-mounting
Support options	Direct remote access, Palas webserver service
Operating system	Windows 10 IoT (LTSC)
Power consumption	100 W
Installation conditions	+5 – +40 °C (control unit)
Dimensions	185 • 450 • 315 mm (H • W • D) (19")
Weight	Control unit: approx. 8 kg, sensor: approx. 2.8 kg