


# KR-85-370

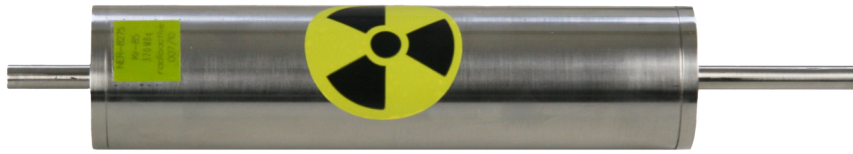

The Kr-85 Neutralizer is a bipolar neutralizer that generates positive and negative ions through ionization with the emitted  $\beta$  radiation. Suppose these ions are brought together with an aerosol; a defined equilibrium charge distribution is established, as is necessary for measuring systems, such as scanning mobility particle sizers (e.g., Palas U-SMPS system). This neutralizer is available in two versions with different activities, 75 MBq, and 370 MBq.

Compared to unipolar neutralization, bipolar neutralization has a significant advantage: regardless of the initial state of charge of the particles, a reproducible equilibrium charge distribution is always established. Bipolar neutralization is mandatory for traceable calibration of a condensation particle counter (e.g., ISO / CD 27891).

As the Kr-85 neutralizer is an enclosed radioactive source, additional requirements ...

## 优势

- Zuverlässige Methode zur Einstellung einer definierten Ladungsverteilung
- Lange Lebensdauer
- Wartungsarm
- Senkt Ihre Betriebskosten

## 应用领域

- Neutralization for SMPS systems
- Neutralization for filter test systems
- Neutralization for diverse measuring tasks and to avoid particle losses due to electrostatic deposition

## 技术数据

体积流量	Up to 5 l/min
外壳	Stainless steel
Aerosol outlet connection	$\varnothing_{\text{inside}}= 4 \text{ mm}$ , $\varnothing_{\text{outside}} = 6.5 \text{ mm}$
Activity of the radiator	370 MBq
Type of radiation	$\beta$ -radiation
工作原理	Ionisation of air molecules by radioactive radiation
Half-life period of the radiator	10.8 years
Aerosol inlet connection	$\varnothing_{\text{inside}}= 4 \text{ mm}$ , $\varnothing_{\text{outside}} = 6.5 \text{ mm}$
Dimensions	38.3 • 220 mm ( $\varnothing$ • L)
重量	500 g