


MMTC 2000 EHF

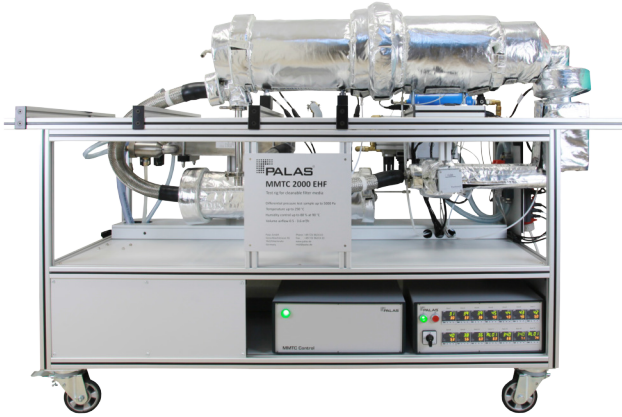

In this version, the filter holder MMTC 2000 EHF is made of V2A to cover a higher temperature range. Adding heating and insulation allows filter testing at temperatures up to 250 °C.

In addition, the relative humidity can be controlled on this system up to 80% rel. humidity at a maximum temperature of 90 °C.

工作原理

优势

- MMTC 2000 EHF: can be heated to 250°C; relative humidity can be set to levels up to 80% (at a temperature of 90°C).
- 测试方法的重现性高
- 可使用实际应用中的不同粉尘
- 快速且简单地调节原始气体浓度
- 模拟所谓的“花环效应”
- 适用于原位测量
- 使用光散射光谱仪welas® digital 在线测量粒径及颗粒物浓度
- 设计轻巧、紧凑、可移动
- 操作简便，易于清洁
- 更换滤料或测试粉尘时快速完成设置
- 在出厂前验收测试中验证各组件及整个系统的功能
- 运行可靠
- 设置时间短，维护需求低

标准和证书

VDI 3926

技术数据

| | |
|-----------------------------------|---|
| 气溶胶 | Dusts (e. g. SAE dusts) |
| 滤材测试面积 | 177 cm ² |
| 体积流量 | 1 – 5.5 m ³ /h (others on request, suction mode) |
| 电源 | 120 – 230 V, 2A (single phase connection) |
| Differential pressure measurement | 0 – 5,000 Pa |
| Inflow velocity | 3 – 8.8 cm/s (others on request) |
| Compressed air supply | 6 – 8 bar |
| Pulverdispergierer | RBG 2000 for non-cohesive powders and bulks as e. g. Pural NF, Pural SB, ISO A2 fine, ISO A4 coarse, different types of TiO ₂ and other powders from practice, mass flow: approx. 0.2–90 g/m ³ (depending on powder size and density) |
| Valve opening times | 50 – 500 ms |
| Pressure for pulse jet cleaning | Adjustable up to 6 bar _g |
| Dimensions | Approx. 1,200 • 630 • 1,700 mm (H • W • D) |
| Special features | Heatable up to 250 °C |

应用领域

- 符合VDI 3926 标准的标准化测试
- 根据不同工艺条件（例如水泥行业、木材加工业、制药行业、化学工业、核电站以及许多其他领域）定义的接近真实工况的个性化测试



Mehr Informationen:
<https://www.palas.de/zh/product/mmtc2000ehf>