



Fidas® Smart 100 is the most advanced compact measuring instrument for ambient air quality. It continuously and reliably analyzes airborne fine dust particles in the size range of 0.18 – 18 μm . The Fidas® Smart is approved by TÜV for PM_{2.5} and PM₁₀ for official measurements.

In addition to the fine dust fraction relevant for regulatory immission control, Fidas® Smart 100 simultaneously calculates and stores PM₁, PM₄, total dust, particle number concentration, and their particle size distribution, including pressure, temperature, humidity, CO₂, and carbon-based PM fractions (PMx_CE).

MODEL VARIATIONS



Fidas® Smart 100 E

Fine dust measuring device for existing roof openings for measuring PM_{2.5} and PM₁₀ (EN 16450-certified) and other parameters such as PM₁, PM₄, TSP

工作原理

COMPACT MEASURING INSTRUMENT FOR THE DETERMINATION OF FINE DUST

The system works on the 90-degree scattered light measurement principle on a single particle, considering signal duration and shape. Technology and algorithms were developed based on the EN 16450-certified **Fidas® 200**¹. Automatic calibration tracking of the measurement system allows operation for up to two years without recalibration. If necessary, the calibration status can be checked and corrected using a test dust calibrated by Palas.

Palas aerosol spectrometers are thus the only optical fine dust measuring instruments that can be calibrated against a traceable standard by the user at the point of operation.

Fidas® Smart 100 features Ethernet, WLAN, and mobile phone connectivity. All measured values are calculated and recorded directly and, if desired, can be transferred to Palas' own cloud **MyAtmosphere**² directly for visualization or further processing.

Comparison measurement

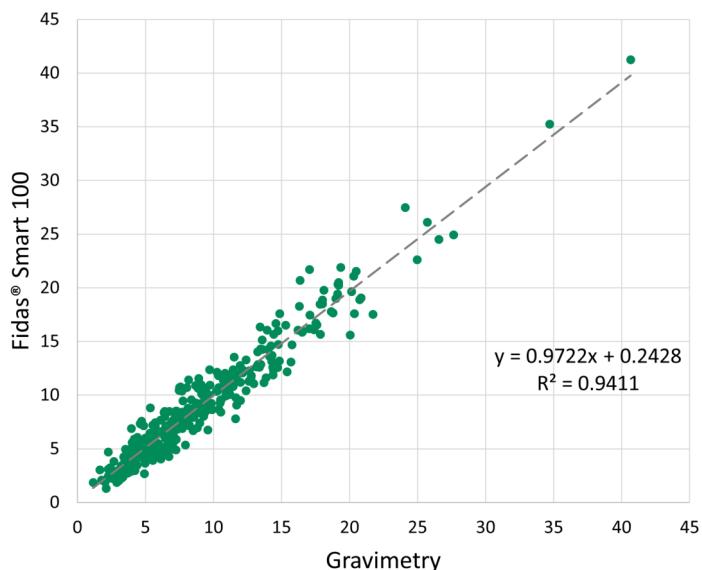


Fig. 1: Fidas® Smart 100 vs. Gravimetry PM_{2.5}

¹Fidas® 200: <https://www.palas.de//product/fidas200>

²MyAtmosphere: <https://my-atmosphere.net/>

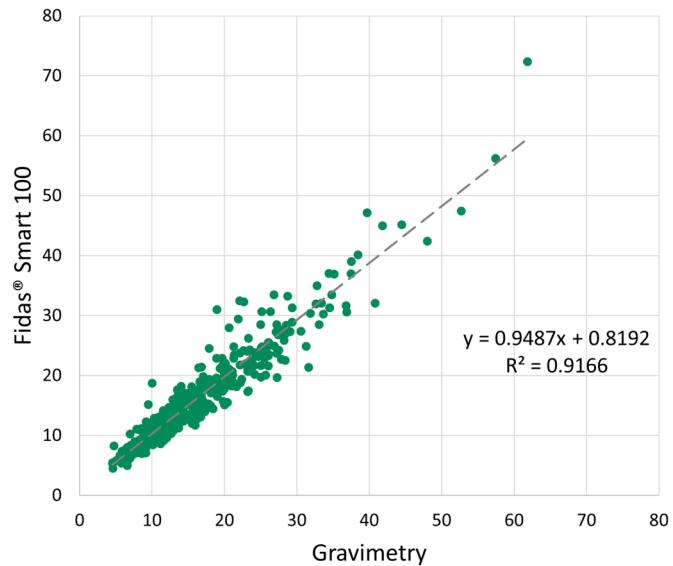


Fig. 2: Fidas® Smart 100 vs. Gravimetry PM₁₀

Extensions/Accessories

Fidas® Smart 100 is equipped with robust weather protection and can be combined with various commercially available mounting systems via a VESA mount.

优势

- Technology based on the certified Fidas® 200 series (EN16450 and MCERTS); simultaneous measurement of C_n , PM_1 , $PM_{2.5}$, PM_4 , PM_{10}
- High accuracy due to advanced algorithms
- Long-term stable: up to 2 years of operation without calibration possible.
- On-site calibration with test dust (NIST traceable) is possible
- Operation with AC or DC power source
- Long-life blower for sample airflow
- Regulated aerosol heating to avoid condensation

标准和证书

ISO 21501-1, EN 15267, EN 16450

技术数据

测量原理	Optical light scattering at single particles, 90° sideways scattering
报告数据	PM _{2.5} , PM ₁₀ (optional PM ₁ , PM ₄ , PM _{xCE} , TSP), C _N , CN, T, rH, p, CO ₂ , particle size distribution, AQI
测量范围(数量浓度)	0 – 20,000 particles/cm ³
测量范围(粒径)	0.178- 17.8 μ m
测量范围(质量)	0 – 20,000 μ g/m ³
测量不确定性	9.0 % for PM _{2.5} , 9.7 % for PM ₁₀ (expanded measurement uncertainty according to EN 16450, TÜV Report)
体积流量	1 l/min +/-1.5% (-20 to +50°C), time-of-flight volume flow control
Size channels	64 (32/decade)
Time resolution	1s - 60s
接口	USB, Ethernet (LAN), Wi-Fi, 4G (optional via LTE stick)
User interface	Touchscreen 800 • 480 Pixel, 5" (12,7 cm)
Protocols	UDP, ASCII, Modbus, Bayern/Hessen
Data logger storage	Approx. 6 GB data storage (2 years)
Data acquisition	Max. 256 raw data channels (32 size channels/decade)
Light source	Polychromatic LED
外壳	Polymer housing with weather protection and tripod/wall/pole mount option
Operating system	Windows 10 IoT (LTSA)
电源	115 – 230 V, 50/60 Hz
Power consumption	Normal operation: 15 W, max. 60 W
Installation conditions	Operating temperature: -20 to +50 °C (weatherproof), operating humidity: 0 to 100% (non-condensing)
Sampling head	Sigma head (non-selective passive collector)
Dimensions	240 • 320 • 190 mm (H • W • D)
重量	3.9 kg
Sampling system	Intelligent Aerosol Drying System (Compact-IADS) -Version E: extended inlet for installation in measuring containers
Noise emission	< 40 dB(A)
Resolution	0.1 μ g/m ³
Data Management	Prepared for connection to the Palas Cloud MyAtmosphere ("MyAtmosphere-ready")

应用领域

- Regulatory environmental monitoring
- Construction sites
- Networks with roads, railways, and ports
- Smart City
- Occupational safety
- Industry



Mehr Informationen:
<https://www.palas.de/product/fidas-smart100>